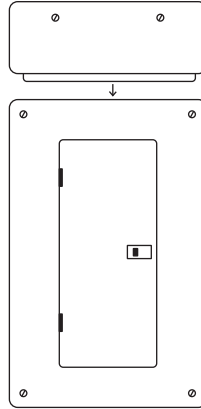
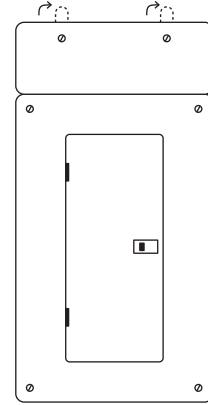
**1**

**Cut and remove**  
5 ¼" H x 14 ½" W of drywall  
above or below panel.

**2**

**Insert PanelPal by sliding**  
lip behind panel cover and  
push flush against drywall.

**3**

**Use a Phillips head**  
driver to tighten tabs  
behind drywall.

The Panel Pal is an innovative access panel installed above or below an electrical panel that eliminates the need for patching drywall. Use for adding a new circuit, change-outs, repairs, additions, renovations, upgrades, and more! **CAUTION:** Take safety measures when dealing with electricity. Turn power off to prevent injury.